



DOWNHOLE DRILLING MOTORS

Model No: DD475456.3 4.75" 4/5 Lobes 6.3 Stages





PERFORMANCE SPECIFICATIONS

Torque Slope	2.730 ft-lb/psi 0.537 Nm/kPa
Flow Range	100 to 250 GPM 380 to 950 Litre/min
Rotation	1.020 Rev/Gal 0.270 Rev/Litre
Speed Range	102 to 260 RPM
Off Bottom Press	88 psi 610 kPa

PERFORMANCE DETAILS

	NBR-1A & HSN-38	NBR-HR
Max Diff Press psi (kPa)	950 (6520)	1420 (9770)
Max Torque ft-lb (Nm)	2580 (3500)	3870 (5250)
Stall Diff Press psi (kPa)	1420 (9770)	2130 (14660)
Stall Torque ft-lb (Nm)	3870 (5250)	5800 (7870)
Max Recommended HP (kW)	125 (93)	177 (132)

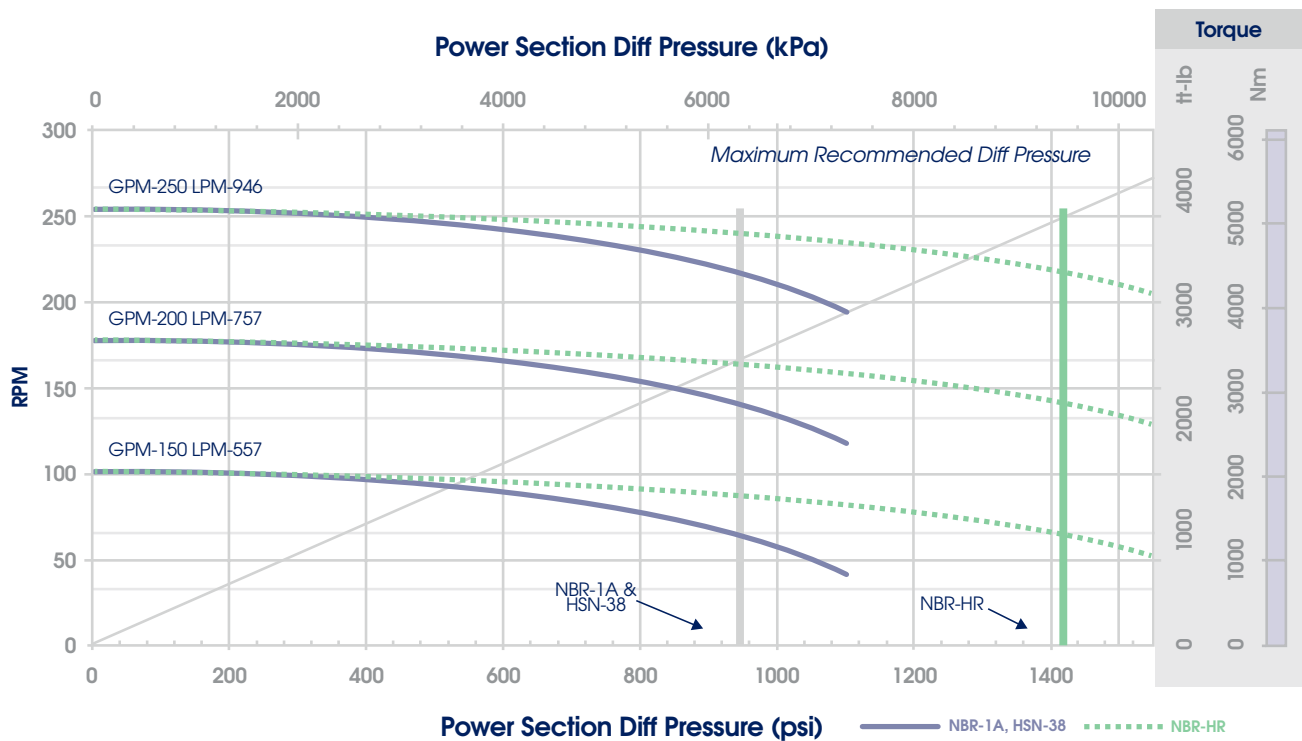

PRODIRECTIONAL

prodirectional.com | 800.204.0009