

DOWNHOLE DRILLING MOTORS

Model No: DD475782.6 ESX 4.75" 7/8 Lobes 2.6 Stages





PERFORMANCE SPECIFICATIONS

Torque Slope	8.974 ft-lb/psi 1.765 Nm/kPa
Flow Range	150 to 300 GPM 570 to 1140 Litre/min
Rotation	0.263 Rev/Gal 0.070 Rev/Litre
Speed Range	39 to 79 RPM
Off Bottom Press	46 psi 320 kPa

PERFORMANCE DETAILS

	NBR-1A & HSN-38	NBR-HR
Max Diff Press psi (kPa)	390 (2690)	590 (4030)
Max Torque ft-lb (Nm)	3500 (4750)	5250 (7120)
Stall Diff Press psi (kPa)	590 (4030)	880 (6050)
Stall Torque ft-lb (Nm)	5250 (7120)	7880 (10680)
Max Recommended HP (kW)	53 (39)	75 (56)

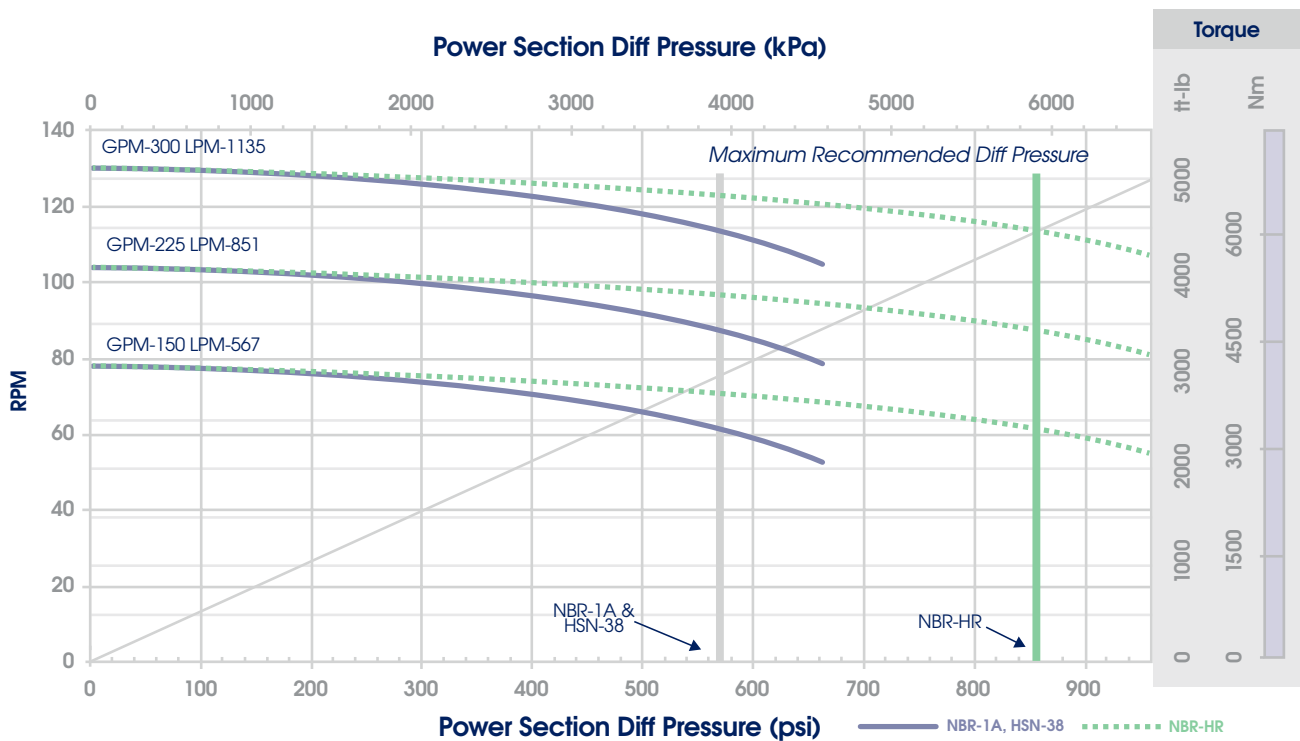

PRODIRECTIONAL

prodirectional.com | 800.204.0009