

DOWNHOLE DRILLING MOTORS

Model No: DD650783.3 ESX2 6.50" 7/8 Lobes 3.3 Stages





PERFORMANCE SPECIFICATIONS

Torque Slope	15.556 ft-lb/psi 3.059 Nm/kPa
Flow Range	300 to 500 GPM 1140 to 1890 Litre/min
Rotation	0.160 Rev/Gal 0.042 Rev/Litre
Speed Range	48 to 80 RPM
Off Bottom Press	64 psi 440 kPa

PERFORMANCE DETAILS

	NBR-1A & HSN-38	NBR-HR
Max Diff Press psi (kPa)	500 (3410)	740 (5120)
Max Torque ft-lb (Nm)	7700 (10440)	11550 (15660)
Stall Diff Press psi (kPa)	740 (5120)	1110 (7680)
Stall Torque ft-lb (Nm)	11550 (15660)	17330 (23490)
Max Recommended HP (kW)	117 (87)	165 (123)

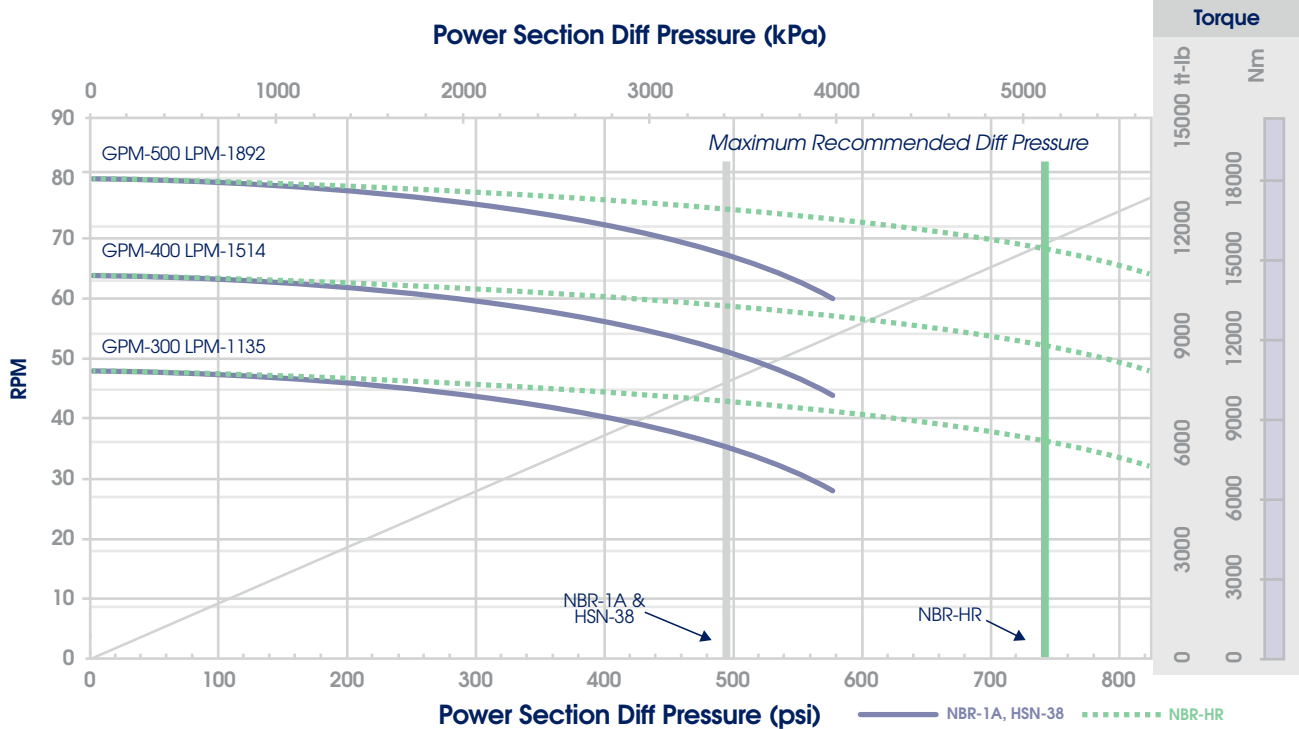

PRODIRECTIONAL

prodirectional.com | 800.204.0009