



DOWNHOLE DRILLING MOTORS

Model No: DD675785.7 SX2 6.75" 7/8 Lobes 5.7 Stages





PERFORMANCE SPECIFICATIONS

Torque Slope	10.698 ft-lb/psi 2.104 Nm/kPa
Flow Range	300 to 600 GPM 1140 to 2270 Litre/min
Rotation	0.242 Rev/Gal 0.064 Rev/Litre
Speed Range	72 to 150 RPM
Off Bottom Press	106 psi 730 kPa

PERFORMANCE DETAILS

	NBR-1A & HSN-38	NBR-HR
Max Diff Press psi (kPa)	860 (5900)	1280 (8840)
Max Torque ft-lb (Nm)	9150 (12400)	13720 (18600)
Stall Diff Press psi (kPa)	1280 (8840)	1920 (13260)
Stall Torque ft-lb (Nm)	13720 (18600)	20580 (27910)
Max Recommended HP (kW)	253 (188)	355 (265)

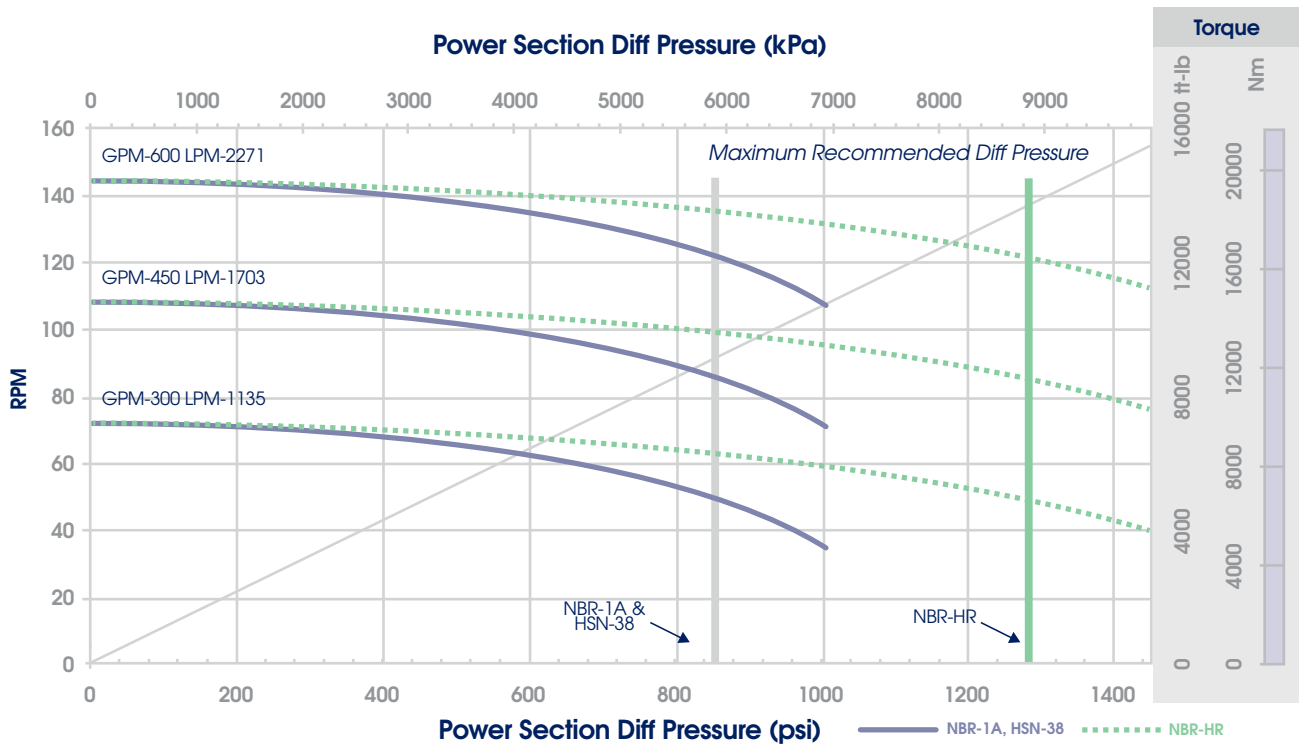

ProDirectional

prodirectional.com | 800.204.0009